APPLICATIONS

(see chart inside for specific applications)


Toyota/Scion multi-application 6" to 6.75" speaker adapter 82-8148

KIT FEATURES

Provides spacing for aftermarket speaker installation.
Works with all varieties of speakers including component drivers

KIT COMPONENTS

A) (2) Speaker Adapters
B) (8) 8-32 x 1 ¼" bolts
C) (8) 8-32 Lock-nuts
D) (16) Flat-washers

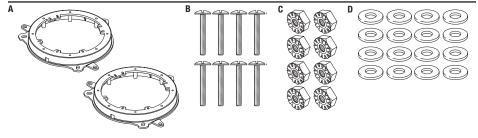

TOOLS REQUIRED

• Panel removal tool • Phillips screwdriver • Socket wrench • Drill

CAUTION: Metra recommends disconnecting the negative battery terminal before beginning any installation. All accessories, switches, and especially air bag indicator lights must be plugged in before reconnecting the battery or cycling the ignition.

NOTE: Refer to the instructions included with the aftermarket radio.



82-8148

Applications


Lexus CT rear location	Toyota Corolla front location	2001-2012
Lexus ES front and rear locations	Toyota Echo front location	2000-2005
Lexus GS front location	Toyota Highlander rear location	2008-2012
Lexus GX rear location	Toyota Matrix front and rear locations	2002-2011
Lexus IS front location	Toyota Prius front and rear locations	2001-2011
Lexus IS rear location	Toyota RAV4 front and rear locations	2001-2011
Lexus RX front and rear locations	Toyota Sequoia front and rear locations	2008-2012
Pontiac Vibe front and rear locations2003-2009	Toyota Sienna front and rear locations	1998-2012
Scion tC front and rear locations2005-2012	Toyota Solara front location	1998-2003
Scion xA front and rear locations	Toyota Tacoma rear location	2005-2013
Scion xB front location	Toyota Tundra rear location	2000-2013
Scion xB rear location	Toyota Tundra front location	2003-2006
Scion xD front and rear locations2008-2011	Toyota Venza rear location	2009-2011
Toyota 4Runner rear location	Toyota Yaris front location	2007-2012
Toyota Avalon rear location	Toyota Yaris liftback rear location	2007-2012
Toyota Celica front and rear locations		



82-8148

Kit Assembly

- Some factory speakers are mounted to the door with rivets. Drill the center of the rivets carefully to remove the factory speaker. Hardware has been provided to use in place of the rivets.
- 2. Mount the aftermarket speaker to the speaker adapter plate with the screws supplied with the speaker. (Figure A)

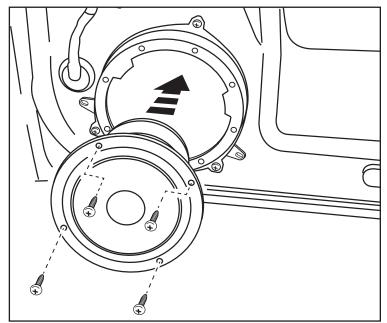

(Figure A)



INSTALLATION INSTRUCTIONS FOR PART 82-8148





KNOWLEDGE IS POWER Enhance your installation and fabrication skills by

enrolling in the most recognized and respected mobile electronics school in our industry. Log onto www.installerinstitute.com or call 800-354-6782 for more information and take steps toward a better tomorrow.



Metra recommends MECP certified technicians