




Pacific Accessory Corporation

Audio Source Switcher

2 Audio inputs to 1 Audio output

Installation

1. **Red power wire:** Connect this wire to a +12volts switched source.
2. **Black power wire:** Connect this wire to chassis ground.
3. **Brown wire:** Connect this wire to chassis ground if both input sources are not using the vehicle's battery as a power source.
Example; Portable MP3/CD players.
4. **Blue/Wht trigger wire:** Connecting this wire to a constant +12volt source will switch the AS21 to Auxiliary 2. Some video players have a remote wire that turns on when the video player is turned on.
5. **Gray/Blk trigger wire:** Connecting this wire to chassis ground will switch the AS21 to Auxiliary 2.

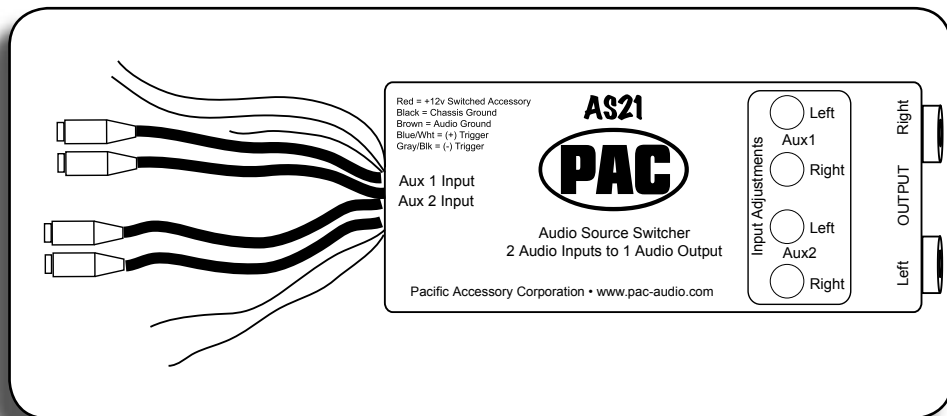

Maximum input/output voltage: 2 VAC.

Current draw: between 10 to 20 ma.

Pacific Accessory Corporation - 1502 S. Santa Fe Street, Santa Ana, CA 92705
techsupport@pac-audio.com • Voice: 714-835-3022 • Fax: 714-835-3233 • www.pac-audio.com