



INSTALLATION INSTRUCTIONS FOR PART 95-8901

APPLICATIONS

Subaru Legacy/Outback 2005-2009

For manual climate controls only, excluding Outback Sport.

95-8901




KIT FEATURES

- Double DIN radio provision
- *Painted to match the factory color and finish*

KIT COMPONENTS

- A) Radio Housing • B) Brackets • C) (5) #8 x 3/8" Phillips Screws

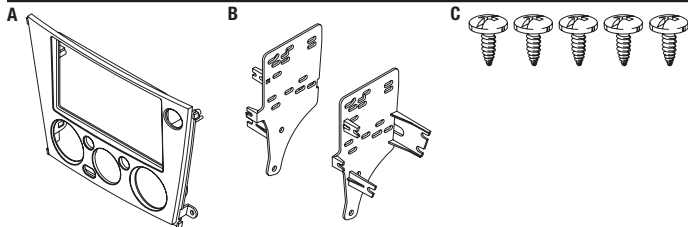

WIRING & ANTENNA CONNECTIONS (sold separately)

Wiring Harness: • 70-8901 Subaru harness 1990-up

Antenna Adapter: • 40-SB10 Subaru antenna adapter 2005-up

Table of Contents

Dash Disassembly

- Subaru Legacy/Outback 2005-2009..... 2

Kit Assembly

- Double DIN radio provision 3

TOOLS REQUIRED

- Panel removal tool • Phillips screwdriver
- Socket Wrench

CAUTION: Metra recommends disconnecting the negative battery terminal before beginning any installation. All accessories, switches, and especially air bag indicator lights must be plugged in before reconnecting the battery or cycling the ignition.


NOTE: Refer to the instructions included with the aftermarket radio.

Dash Disassembly

1. Unclip and remove panel surrounding shifter including ashtray. (Figure A)
2. Remove (1) Phillips screw per side panel then unclip and remove panels. (Figure B)
3. Remove (6) Phillips from radio to remove. (Figure C)



(Figure A)

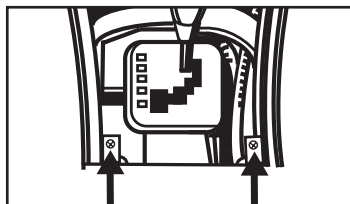

(Figure B)




(Figure C)

4. Remove (4) screws securing the climate control to the radio/climate control assembly then unclip and remove climate control. (Figure D)

NOTE: You will need to unclip the climate control cable from behind the pocket, above the radio, in order to remove the radio and climate controls. (use caution when removing the pocket as the dash will scratch very easily) (Figure E)

Continue to kit assembly

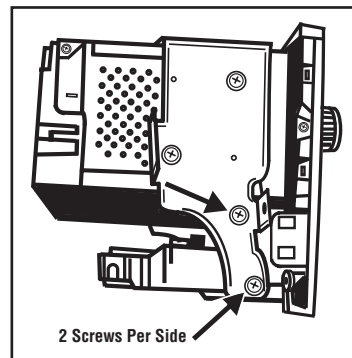

(Figure D)




(Figure E)


Kit Assembly

ISO DDIN radio provision

1. Clip the climate control into the back of the 95-8901. (Figure A)
2. Attach the hazard switch to the radio housing trim panel with the supplied (1) #8 x 3/8" Phillips screw supplied. (Figure A)
3. Attach the radio brackets to the radio housing trim panel using the (4) #8 x 3/8" Phillips screws supplied. (Figure B)
4. Secure the climate control to the brackets using the factory screws. (Figure C)




(Figure A)




(Figure B)

5. Slide the radio into the bracket/radio housing trim panel assembly and secure to the assembly using the screws supplied with the radio. (Figure D)
6. Locate the factory wiring harness in the dash. Metra recommends using the proper mating adapter from Metra or AXXESS. Re-connect the negative battery terminal and test the unit for proper operation.
7. Reassemble dash in reverse order of disassembly.

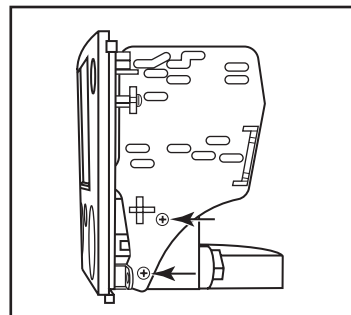

(Figure C)

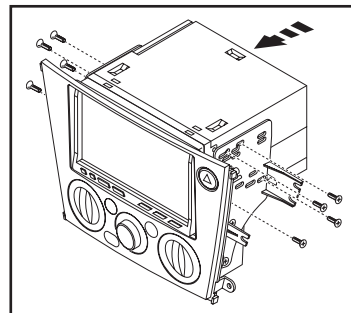

(Figure D)



INSTALLATION INSTRUCTIONS FOR PART 95-8901



REV 1/28/2014 INST95-8901



KNOWLEDGE IS POWER

Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto www.installerinstitute.com or call 800-354-6782 for more information and take steps toward a better tomorrow.



**Metra recommends MECP
certified technicians**