

INSTALLATION INSTRUCTIONS FOR PART 99-7405

APPLICATIONS 2004 NISSAN TITAN

99-7405


KIT FEATURES

- DIN Head Unit Provisions with Pocket
- ISO DIN Head Unit Provisions with Pocket

KIT COMPONENTS

A) Radio Housing I B) ISO Brackets I C) ISO Trim Plate



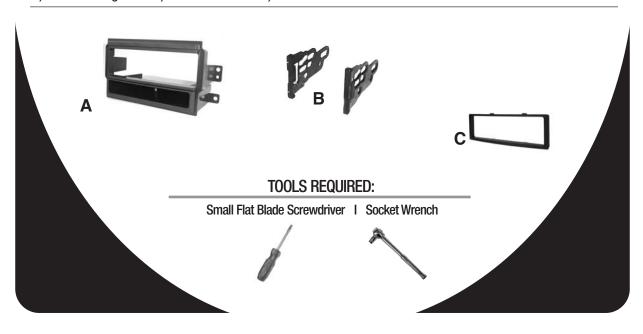





	• Dash Disassembly	
	- 2004 Nissan Titan	1
S	• Kit Assembly	
	•	_
7	- DIN Head Unit Provision	2
	- ISO DIN Head Unit Provision	3
	• Final Assembly	4
	• Notes	5
L		
Ш		


2004 NISSAN TITAN

1 Disconnect the negative battery terminal to prevent an accidental short circuit.

Unclip and remove entire panel surrounding radio and climate controls.(Figure A)



3 Remove (4) Phillips screws to remove radio. **(Figure B)**



DASH DISASSEMBLY



DIN Head Unit Provision


- 1 Slide the DIN cage into the Radio Housing and secure by bending the metal locking tabs down.
- 2 Slide the after-market head unit into the cage and secure.





ISO DIN HEAD UNIT PROVISION


- 1 Mount the ISO Brackets to the head unit with the screws supplied with the unit.
- 2 Slide the head unit into the radio opening until the side clips engage.
- **3** Snap the Trim plate into the Radio Housing.



KIT ASSEMBLY



FINAL ASSEMBLY



- A) Strip wire ends back 1/2"
- B) Twist ends together
- C) Solder
- D) Tape
- 1 Locate the factory wiring harness in the dash. Metra recommends using the proper mating adapter and making the connections as shown. (Isolate and individually tape off the ends of any unused wires to prevent electrical short circuit).
- **2** Re-connect the negative battery terminal and test the unit for proper operation.
- **3** Reassemble radio and dash assemblies in reverse order of disassembly.



NOTES

INST997405