

NAV-TV®

interfacing the future!


NAV-TV PLUG AND PLAY FOR THE BENTLEY CONTINENTAL / GT & VW PHAETON



1: Remove the 4 screws
(2 on each side)



2: Slide the connector into
the radio chassis

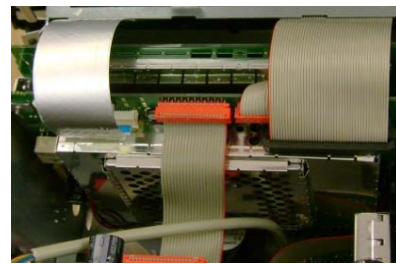

3: Carefully separate the 2 sections.
Locate the silver ribbon cable
and gently disconnect.



4: Place a strip of double sided
tape on the metal. This is to
insulate against shorts. Plug
interface connector in then,
reconnect the silver ribbon cable.



5: Secure the cable coming
out of the back as pictured
above and reassemble
chassis.

RGB converter requires accessory
12v power and ground

Video: Flip the toggle switch. This will
shift the screen and introduce the
external video source.

Backup Camera: Connect blue wire
from converter to 12v(+) of the
of the reverse light. Tie the camera
power & ground to acc power and
chassis ground

This product is for professional installation only. The installer, not NAV-TV assumes ALL
responsibility for any damage to the vehicle or the radio.

Agreement: End user agrees to use this product in compliance with all State and Federal laws. NAV-TV Corp
would not be held liable for misuse of its product. If you do not agree, please discontinue use immediately
and return product to place of purchase.

**Questions: Tech support available through our toll-free number
866-477-3336**