



## INSTALLATION INSTRUCTIONS FOR PART 95-7617GHG

### APPLICATIONS


## Nissan Altima (Sedan) 2013-up 95-7617GHG

### KIT FEATURES

- Double DIN radio provision
- **Painted Grey High Gloss**

### KIT COMPONENTS

- A) Radio Trim Panel • B) Radio Brackets

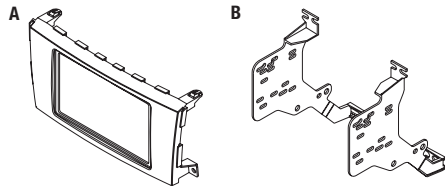

### WIRING & ANTENNA CONNECTIONS (sold separately)

Wiring Harness: • 70-7552 2010-Up Nissan Wire Harness • 70-7554 2010-Up Nissan Wire Harness

Antenna Adapter: • 40-NI12 2010-Up Nissan Antenna Adapter

### TOOLS REQUIRED

- Panel removal tool • Phillips screwdriver • Socket Wrench



## Table of Contents

### Dash Disassembly

- Nissan Altima 2013-up..... 2

### Kit Assembly

- Double DIN radio provision ..... 3

**CAUTION:** Metra recommends disconnecting the negative battery terminal before beginning any installation. All accessories, switches, and especially air bag indicator lights must be plugged in before reconnecting the battery or cycling the ignition.


**NOTE:** Refer to the instructions included with the aftermarket radio.




99-7617GHG

## Dash Disassembly


1. Unclip the right side of the driver's knee bolster panel next to the center console and let hang. **Note: There is no need to completely remove the panel.** (Figure A)
2. Unclip and remove the (2) silver side trim panels from each side of the factory radio. (Figure B)
3. Unclip and remove trim panel below the a/c control panel.

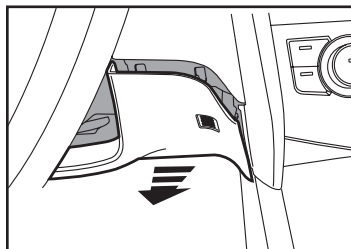

(Figure A)

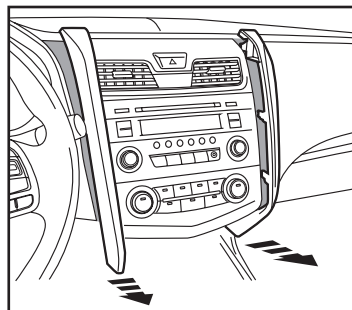


(Figure B)

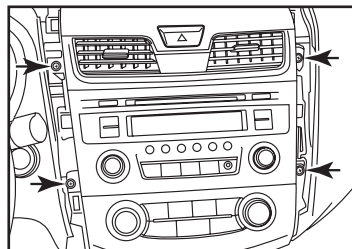


(Figure C)

4. Remove (4) Phillips screws securing the factory radio, a/c control and a/c vents. (Figure D)
5. Remove the a/c controls. (Figure D)
6. Remove the a/c vent panel. (Figure E)
7. Remove the factory radio. (Figure F)
8. If equipped there may be an a/c amp present attached under the radio remove (2) Phillips screws securing the a/c amp.


*Continue to kit assembly*

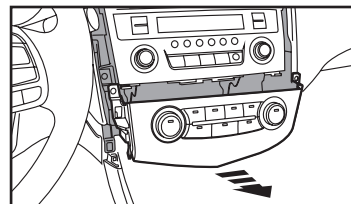

(Figure D)

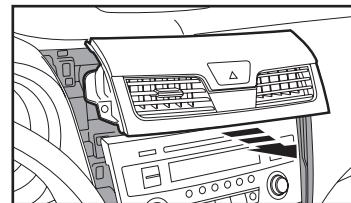

(Figure E)

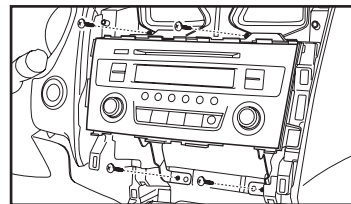

(Figure F)




99-76176HG

## Kit Assembly

### Double DIN radio provision

1. If equipped attach the a/c amp to the radio brackets with the factory hardware. (Figure A)
2. Mount the DDIN radio to the radio brackets using the screws supplied with the radio. (Figure A)
3. Mount the radio/bracket assembly into the dash.
4. Locate the factory wiring harness and antenna plug in the dash. Metra recommends using the proper mating adapters from Metra and/or AXXESS.
5. Reassemble dash in reverse order of disassembly.

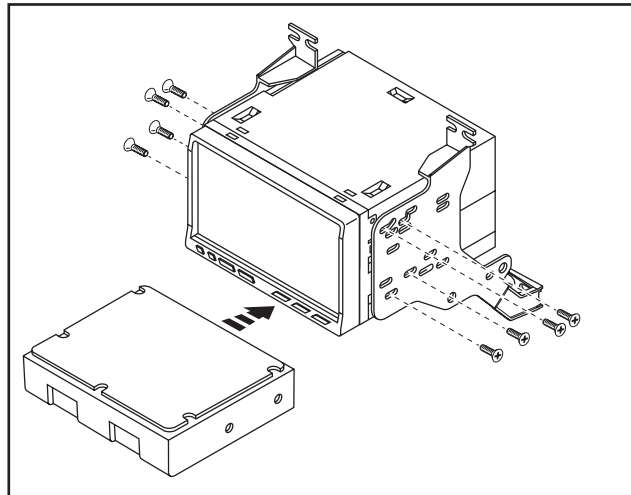

(Figure A)



## INSTALLATION INSTRUCTIONS FOR PART 95-7617GHG

REV 12/10/2012 INST95-7617GHG



### KNOWLEDGE IS POWER

Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto [www.installerinstitute.com](http://www.installerinstitute.com) or call 800-354-6782 for more information and take steps toward a better tomorrow.



**Metra recommends MECP  
certified technicians**