



INSTALLATION INSTRUCTIONS FOR PART 99-7324

APPLICATIONS KIA Optima 2006.5

99-7324


KIT FEATURES

- DIN head unit provision with pocket
- ISO DIN head unit provision with pocket




KIT COMPONENTS


A) Radio Housing • B) ISO Brackets • C) Trim Plate



A





B



C

TOOLS REQUIRED:

Phillips Screwdriver • Small Flat Blade Screwdriver/ Panel Removal Tool



1-800-221-0932



www.metraonline.com

© COPYRIGHT 2004 METRA ELECTRONICS CORPORATION



TABLE OF CONTENTS

Dash Disassembly

- Kia Optima 2006.5 1

Kit Assembly *

- Din Head Unit provision with Pocket 2

- ISO Din Head Unit provision with Pocket 3

Final Assembly 4

***Note:**


Refer also to the instructions included with the aftermarket radio.

KIA OPTIMA 2006.5


- 1** Disconnect the negative battery terminal to prevent an accidental short circuit.
- 2** Unclip and remove the panel surrounding the radio including the a/c vents and climate controls. (Figure A)
- 3** Remove (4) Phillips screws securing radio. Unplug and remove radio. (Figure B)

Continue to kit assembly.

A

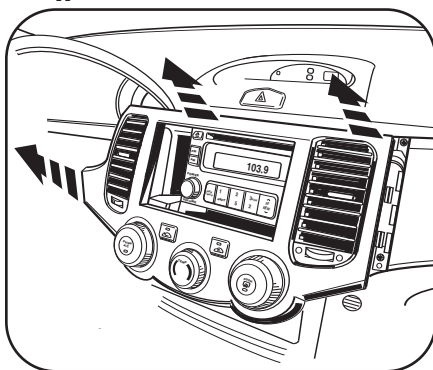

B

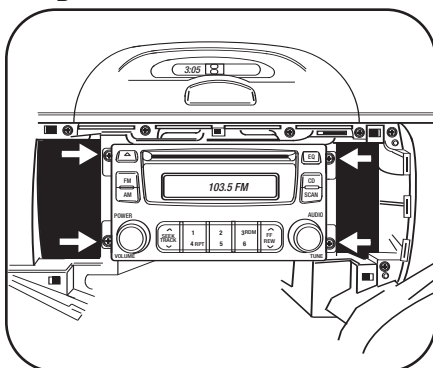



DIN HEAD UNIT PROVISION

****Note: Refer also to the instructions included with the aftermarket radio.***

- 1** Slide the DIN cage into the Radio Housing and secure by bending the metal locking tabs outward (Figure A)

- 2** Slide the aftermarket radio into the cage until it snaps into place. (Figure B)

Continue to final assembly.

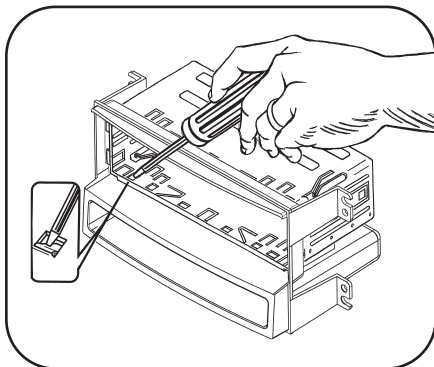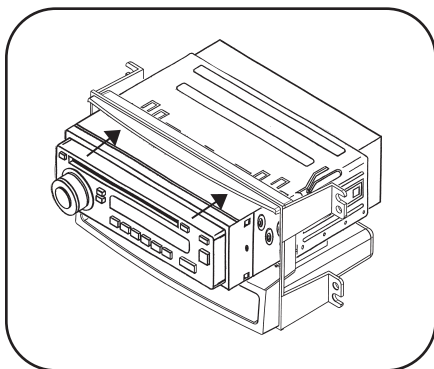A**B**



99-7324 KIT ASSEMBLY


ISO DIN HEAD UNIT PROVISION

**Note: Refer also to the instructions included with the aftermarket radio.*


- 1** Mount the ISO Brackets to the radio using the screws supplied with the radio. (Figure A)
- 2** Slide the radio into the radio opening until the side clips snap into place. (Figure B)
- 3** Snap the trim plate onto the front of the Radio Housing. (Figure B)

Continue to final assembly.


A

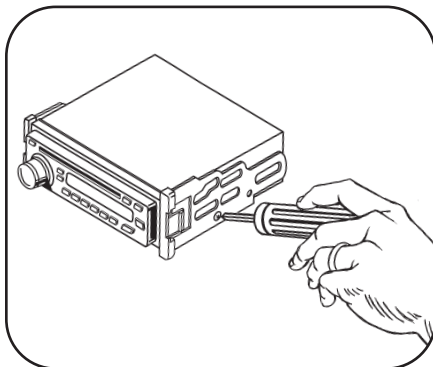

B

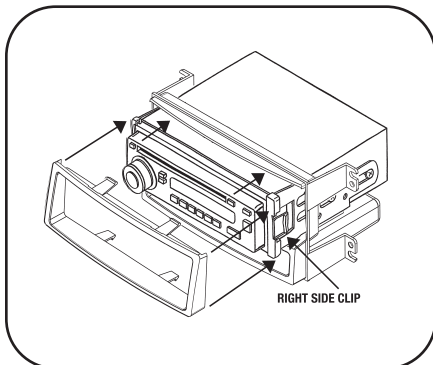

FINAL ASSEMBLY

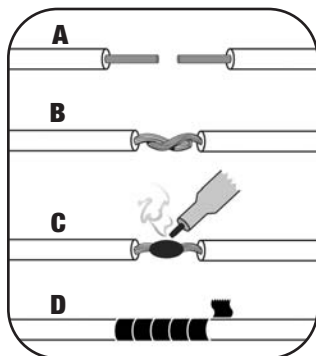

(A) Strip wire ends back 1/2"

B) Twist ends together

C) Solder

D) Tape

- 1** Locate the factory wiring harness in the dash. Metra recommends using the proper mating adapter and making connections as shown. (Isolate and individually tape off the ends of any unused wires to prevent electrical short circuit.)
- 2** Re-connect the negative battery terminal and test the unit for proper operation.
- 3** Reassemble radio and dash assemblies in reverse order of disassembly.

FINAL WIRING CONNECTIONS

Make wiring connections using the EIA color code chart shown below and the instructions included with the head unit. Metra recommends making connections as shown below; Strip, Splice, Solder, Tape. Isolate and individually tape off ends of any unused wires to prevent electrical short circuit.

METRA / EIA WIRING CODE

12V Ignition / Acc. Red

12V Batt / Memory. Yellow

Ground Black*

Power Antenna Blue

Amp Turn-On Blue / White

Amp Ground. Black / White

Illumination Orange

Dimmer Orange / White

Right Front (+) Gray

Right Front (-). Gray/ Black

Left Front (+) White

Left Front (-). White / Black

Right Rear (+) Violet

Right Rear (-). Violet / Black

Left Rear (+) Green

Left Rear (-). Green / Black

***NOTE:** When a Black wire is not present, ground radio to vehicle chassis.

All colors may not be present on all leads due to manufacturer's specifications.



99-7324

NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

99-7324 INSTRUCTIONS



1-800-221-0932



www.metraonline.com

REV. 08/03/06

© COPYRIGHT 2004 METRA ELECTRONICS CORPORATION

INST99-7324